

ELASTEC

# E150

Submersible Pump



Oil Spill Equipment | Floating Barriers | Incinerators




The E150 is a lightweight hydraulically driven submersible pump that is ideal for recovered oil transfer operations as well as other duties. The pump is constructed with low weight and power consumption in mind.

This portable and versatile all purpose pump may also be used for bilge pumping, job site dewatering and transferring oil from barges, bladders and other temporary storage devices. The E150 pump is offered with the Elastec TDS118, TDS136 and Magnum 100 drum skimmer packages.

The E150 Pump is typically packaged with a D10 or E10 power pack (sold separately.)

E150 Part Numbers:

- 4PUMPCE020
- 4PUMPCE022
- 4PUMPCE030
- 4PUMPCE031
- 4PUMPCE032

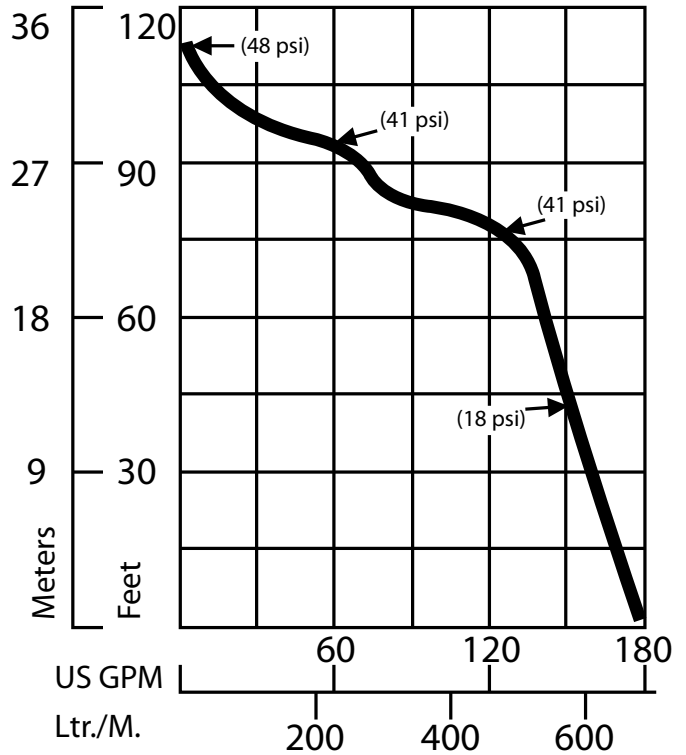

Specification	
Weight:	20 lb / 9 kg
Suction:	2, 3, or 4 inch camlock
Discharge:	2 or 3 inch camlock
Capacity:	180 gpm / 40 cu.m per hour
Max Discharge Pressure:	48 psi / 3.5 bar
Max Discharge Head:	118 ft / 36 m
Duty Point:	60 gpm @ 41 psi head / 13.5 cu.m/hr @ 2.8 bar
Dimensions:	14.5 x 6 x 10.25 inch / 0.37 x 0.15 x 0.26 m
Hydraulic Requirement:	3 gpm / 11 lpm
Hydraulic Pressure:	2,500 psi / 172 bar max



1309 West Main St.  
 Carmi, Illinois 62821, USA  
 +1 (618) 382-2525  
[www.elastec.com](http://www.elastec.com) [elastec@elastec.com](mailto:elastec@elastec.com)