


M4 AIR OPERATED DIAPHRAGM PUMP DESCRIPTION

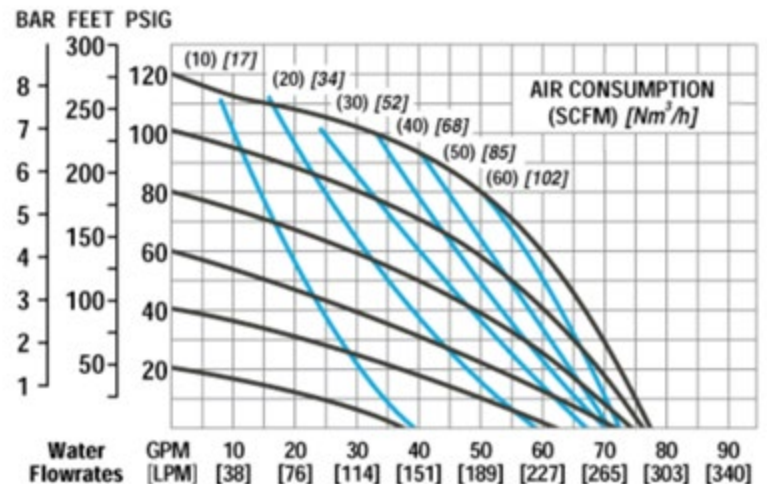

Elastec offers a 1 ½" inch diaphragm pump with our drum skimmers. Diaphragm pumps can self-prime, do not typically emulsify recovered oil and can run dry. They are therefore a good match for an oil skimmer. The M4 pump is supplied with Aluminum, Cast Iron or Stainless body according to the application. Buna, Neoprene, Viton or PTFE Diaphragms & Ball Valves are available.

An Aluminum body & wetted parts with Buna diaphragms are standard.

Specification

Max Flow Rate:	81 gpm / 306 lpm
Max Discharge Pressure:	125 psi / 8.6 bar
Weight Aluminum:	38 lb / 17.5 kg
Max Suction Lift:	19 ft / 5.8 m
Max Diameter Solids:	3/16 inch / 4.8 mm
Temperature Limit Buna-N®:	-12.2 to +65.6 °C / +10 to +150 °F

4PUMPD1220C Pump Diaphragm Air 1.5 inch Alum "C"

4PUMPD1220M Mounted on TDS136 Skimmer