


## M8 Diaphragm Pump Description

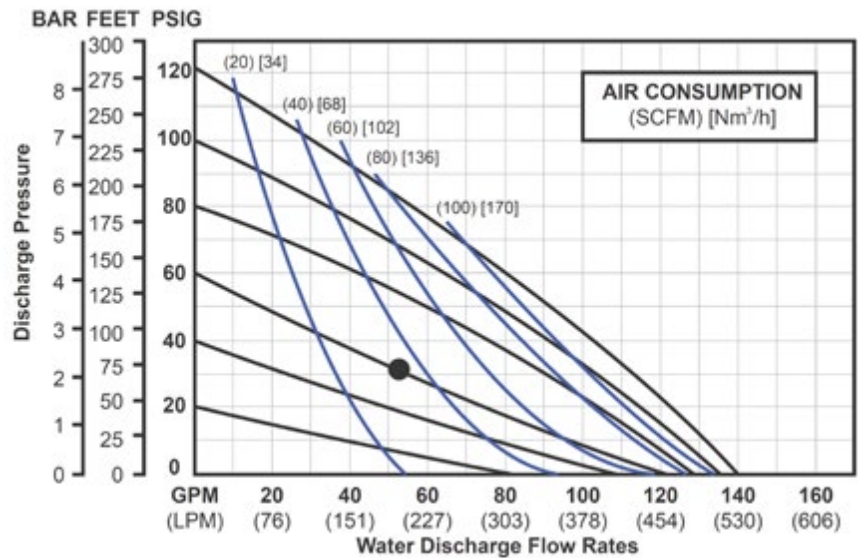

Elastec offers a 2 inch diaphragm pump for use with our drum skimmers or for other pumping applications. Diaphragm pumps can self-prime, do not typically emulsify recovered oil and can run dry. They are therefore a good match for an oil skimmer. The M8 pump can be supplied with an Aluminum, Stainless Steel or Cast Iron body according to the application. Buna, Neoprene, Viton, PTFE, Saniflex, Polyurethane, or Wil-Flex diaphragms & ball valves are available.

An aluminum body and wetted parts with Buna diaphragms are supplied as standard.

### Specification

Max Flow Rate:	139 gpm / 526 lpm
Max Discharge Pressure:	125 psi / 8.6 bar
Weight Aluminum:	70 lb / 32 kg
Maximum Suction Lift:	29 ft / 8.8 m
Maximum Diameter Solid:	3/4 inch / 19 mm
Temperature Limit Buna-N®:	-12.2 to +82.2 °C / +10 to +180 °F

4PUMPD1232C Pump Diaphragm Air 2" Alum "C"

4PUMPD1232M Mounted on 136 Skimmer

4PUMPD1232MM Mounted on Magnum200 Skimmer