



ELASTEC Turbidity Curtains

- Dredging Operations
- Marine Construction
- Remediation Projects

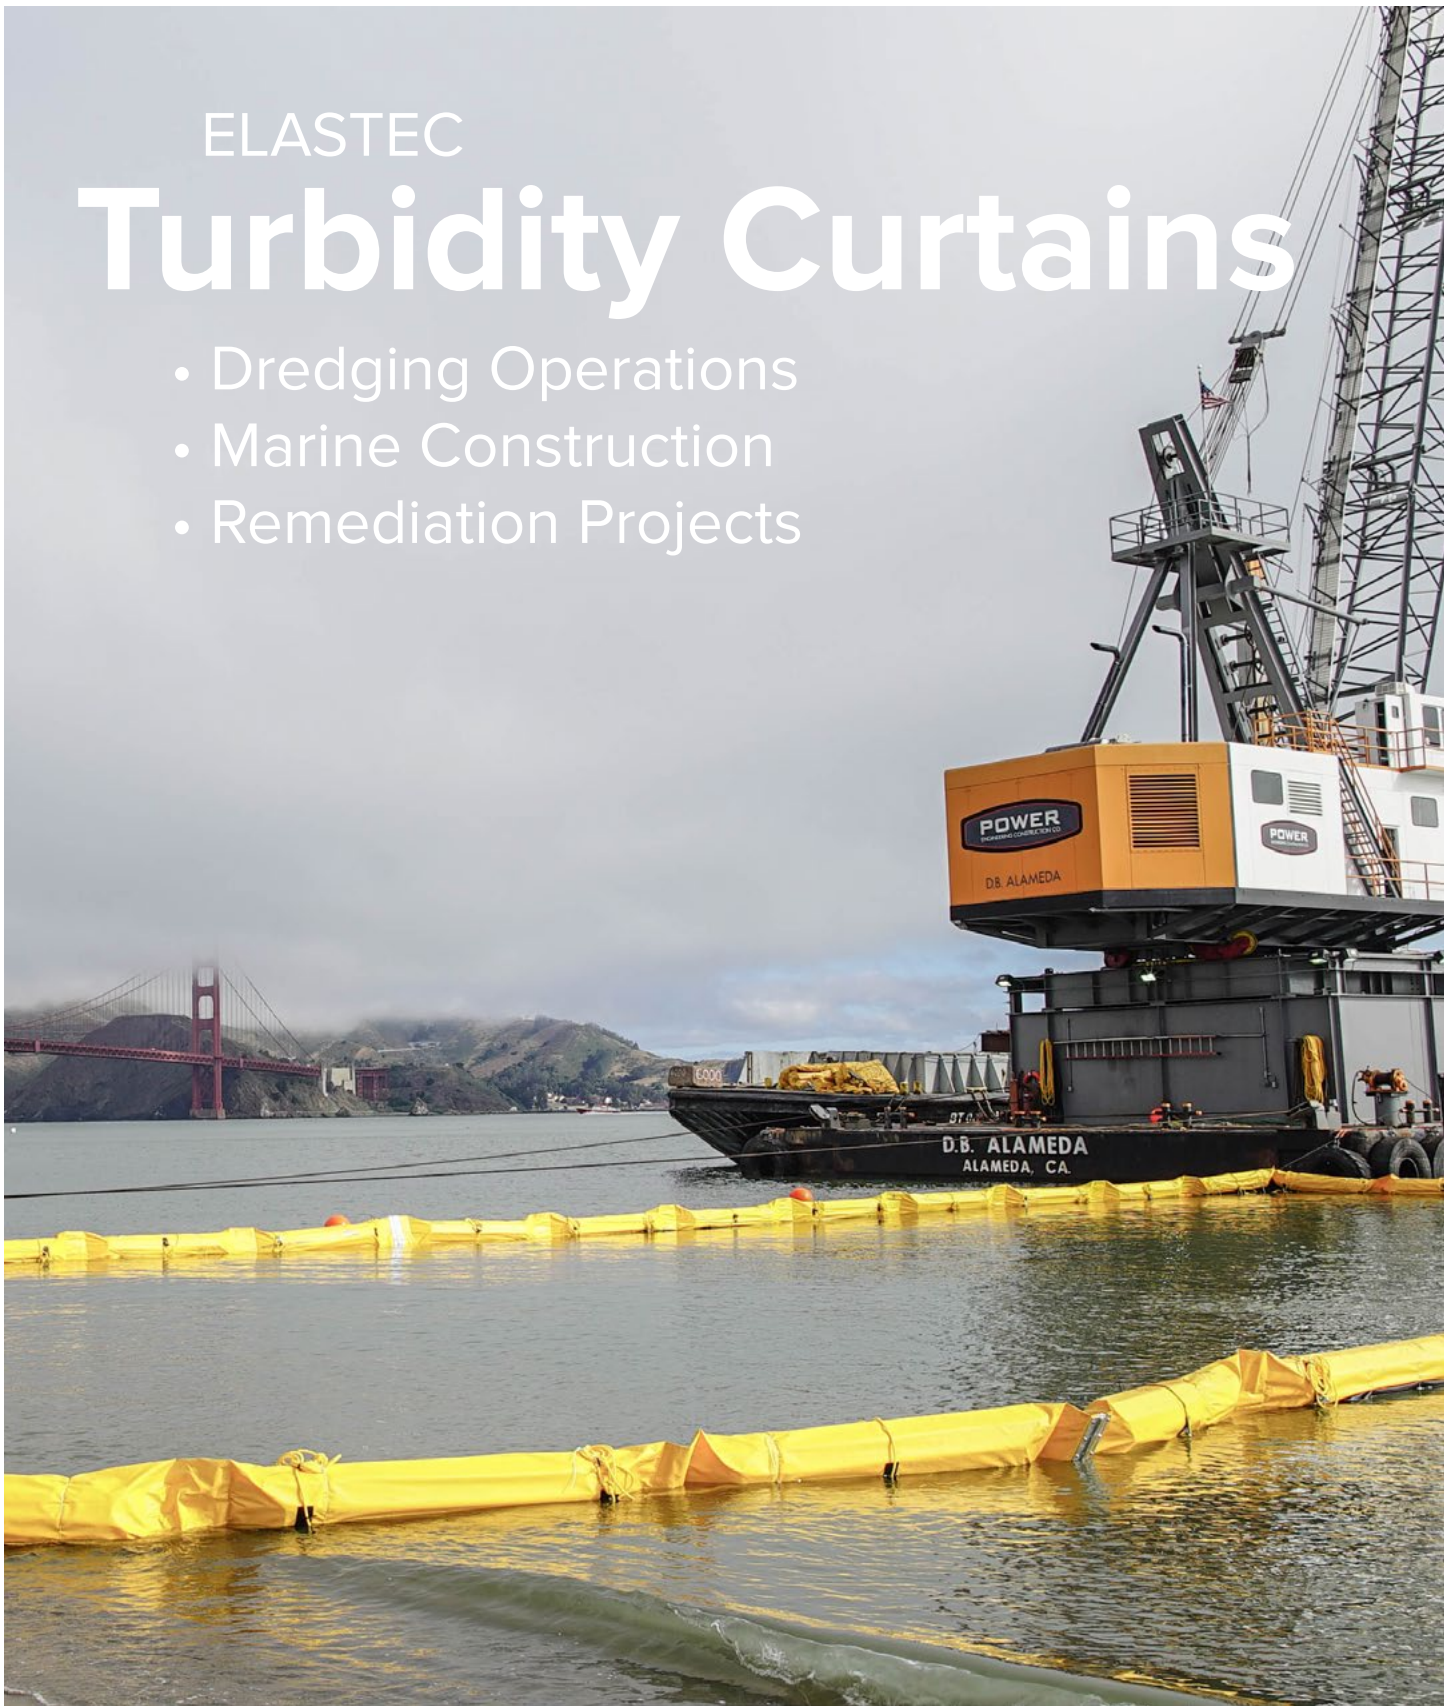


Oil Spill Equipment | Floating Barriers | Incinerators

Stillwater Screen - Type I Light Duty Turbidity Curtain

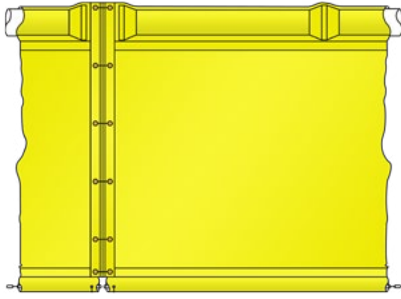


Fabric	18 oz. vinyl laminated fabric
Size	6 inch / 15 cm up to 10 ft / 3 m depth
	8 inch / 20 cm - 11 ft / 3.3 m to 17 ft / 5 m depth
	12 inch / 30 cm - 18 ft / 5.4 m to 30 ft 9.14 m depth
Net Buoyancy	6 inch / 15 cm - 13 lb/ft / 19.2 kg/m
	8 inch / 20 cm - 21 lb/ft / 31 kg/m
	12 inch / 30 cm - 52 lb/ft / 76.8 kg/m
Breaking Strength	5,000 lb / 2,267 kg
Ballast	1/4 inch / 6 mm galvanized chain
Available Depths	3 to 30 ft / .91 to 9.14 m
Length	100 ft / 30 m standard

Fastwater Screen - Type II Medium Duty Turbidity Curtain

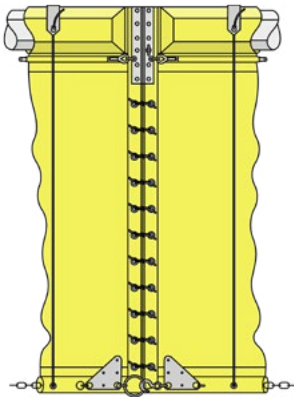

Fabric	22 oz. vinyl coated fabric
Size	8 inch / 20 cm up to 10 ft / 3 m depth
	12 inch / 30 cm - 11 ft / 3.3 m to 17 ft / 5 m depth
Net Buoyancy	6 inch / 15 cm - 13 lb/ft / 19.2 kg/m
	8 inch / 20 cm - 21 lb/ft / 31 kg/m
	12 inch / 30 cm - 52 lb/ft / 76.8 kg/m
Breaking Strength	9,200 lb / 4,173 kg
Ballast	5/16 inch / 8 mm galvanized chain
Available Depths	3 to 30 ft / .91 to 9.14 m
Length	100 ft / 30 m standard

Ruffwater Screen - Type III Heavy Duty Turbidity Curtain



Fabric	22 oz. vinyl coated fabric
Size	12 inch / 30 cm
Net Buoyancy	6 inch / 15 cm - 13 lb/ft / 19.2 kg/m
	8 inch / 20 cm - 21 lb/ft / 31 kg/m
	12 inch / 30 cm - 52 lb/ft / 76.8 kg/m
Breaking Strength	18,400 lb / 8,346 kg
Ballast	3/8 inch / 10 mm galvanized chain
Available Depths	3 to 30 ft / .91 to 9.14 m
Length	100 ft / 30 m standard

Alternate fabrics, flotation material and section lengths available upon request for all models.



926 County Road 1350 N
Carmi, Illinois 62821, USA
+1 (618) 382-2525

www.elastec.com elastec@elastec.com